

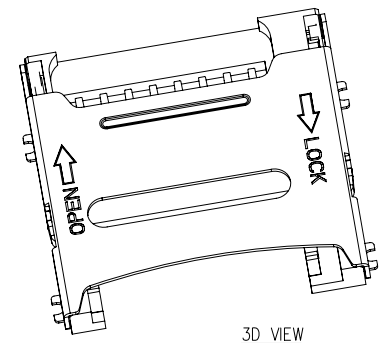
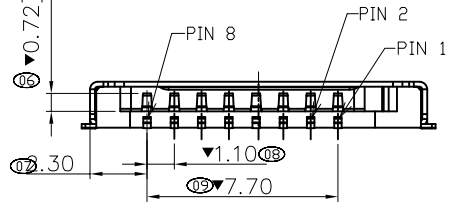


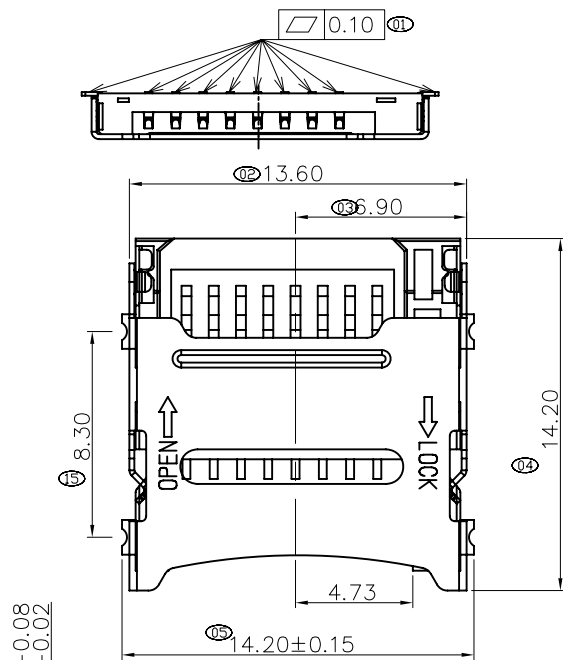


3D VIEW

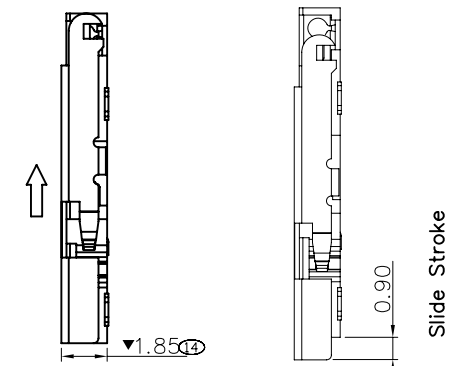

SLIDE SHELL OPEN


SLIDE SHELL LOCK

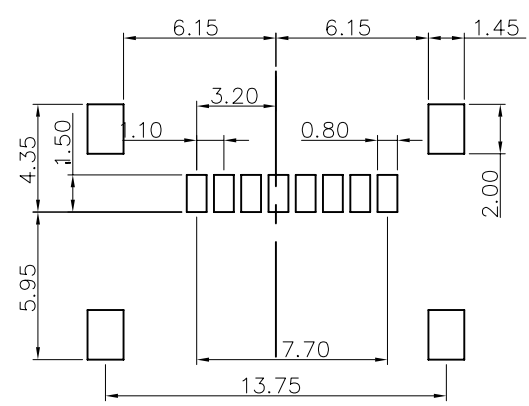

P.C.B LAYOUT

DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.
3/29'16			NEW DWG		AO

PIN NO.	PIN Assignmeng.
PIN1	DAT2
PIN2	CD/DAT3
PIN3	CMD
PIN4	VDD
PIN5	CLK
PIN6	Uss2
PIN7	DAT0
PIN8	DAT1



T-FLASH CARD
SCALE 2:1

- NOTES:
- 1.MATERIAL:
- 1).HOUSING MATERIAL:THERMOPLASTIC UL94V-0;COLOR:BLACK
- 2).CONTACT MATERIAL:COPPER ALLOY,T=0.15mm
- 3).SHELLMATERIAL:STATLESS STEEL,T=0.20mm
- 2.FINISH:
- 1).CONTACT FINISH:30u"min.NICKEL UNDER PLATED,PLATED G/F ON CONTACT AREA;TIN-PLATED HIGH-TEMPER ATURR 80u"-120u" ON SOLDER ARE
- 2).SHELL FINISH:Cleaning.
- 3.ELECTICAL SPECIFICATIONS:
- 1).OPERATING VOLTAGE: 250V(AC/DC).
- 2).CURRENT RATING: 0.5A.
- 3).OPERATING TEMPERATURE: -20°C~+65°C.
- 4).INSULATION RESISTANCE: 1000M OHMS min. at 250VDC.
- 5).DIELECTRIC WITHSTANDING VOLTAGE:500VAC/1minute.
- 6).CONTACT RESISTANCE:100m OHMS max.

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参考表		 东莞市龙科电子科技有限公司 DONGGUAN LONGKE ELECTRONICS CO.,LTD :		TITLE: 产品品名 : T-FLASH 1.80H 掀盖式				
X.X ±0.25	X.X° ±3.00°	APPD: 核准:	PRODUCT NO: 产品料号 : 193-F083K230-B34					
X.XX ±0.20	X.XX° ±1.00°	CHECK:dd 校对:	DATE	SCALE	UNIT	TYPE	PAGE	
X.XXX ±0.10	X.XXX° ±0.500°	DRAW: 绘图: 罗求新	2016.03.29	1:1	mm	CD	1/2	