

由Autodesk 教育版产品制作



A

B


E

F




G

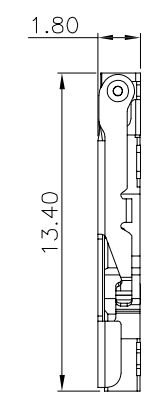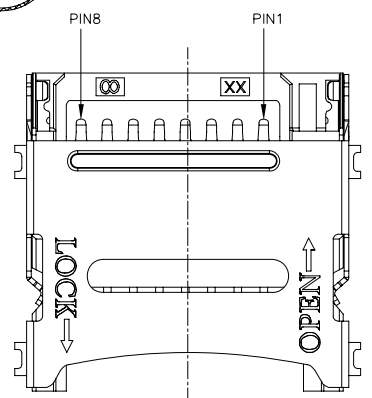


SLIDE SHELL OPEN

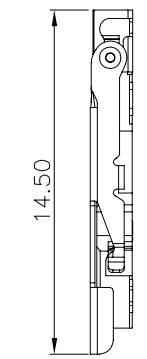

SLIDE SHELL LOCK

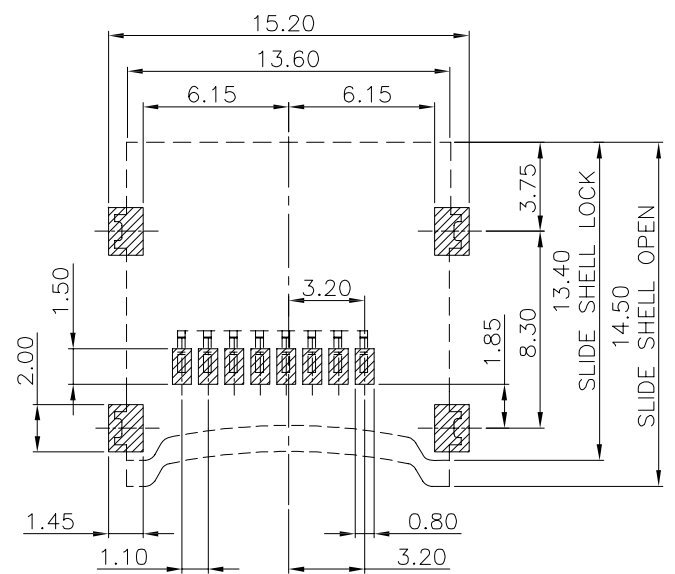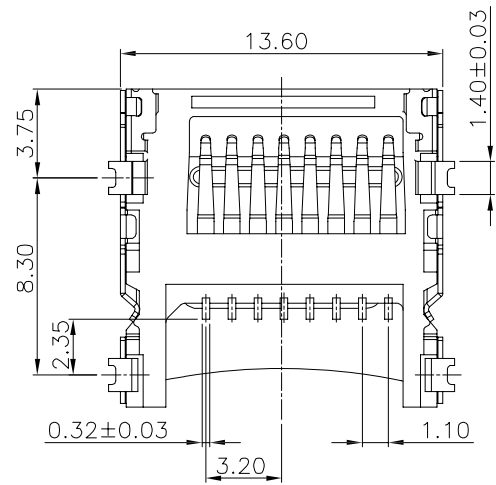

RECOMMEND PCB LAYOUT
TOLERANCE: ± 0.05
TOP VIEW

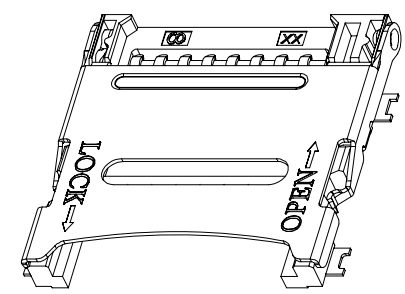

由Autodesk 教育版产品制作

由Autodesk 教育版产品制作


DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.
3/29'16			NEW DWG		AO

MATERIALS

- HOUSING : THERMOPLASTIC ,UL94 V-0.
- TERMINAL : COPPER ALLOY, PLATING SEE TABLE.
PLATING: GOLD PLATED ON CONTACT AREA,
G/F GOLD PLATED ON SOLDER TAILS.
- SHELL : SUS.
- SOLDER : COPPER ALLOY .
PLATING :80u"~120u" TIN PLATED ON SOLDER TAILS,
50U"~80U" NICKEL PLATED OVERALL.

SPECIFICATION

- CURRENT RATING : 0.5 A. MAX.
- VOLTAGE RATING:5V.
- DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR 1 MINUTE.
- INSULATION RESISTANCE : 100MQ MIN.AT 5V DC.
- CONTACT RESISTANCE : 50mΩ MAX.
- OPERATING TEMPERATURE : -30°C TO +85°C.
- DURABILITY:5000 CYCLES.

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参考表				 东莞市龙科电子科技有限公司 DONGGUAN LONGKE ELECTRONICS CO.,LTD :						
						TITLE: T-FLASH-SOCKET 掀盖式 产品品名: 无柱 H=1.8				
X.X	±0.25	X.X°	±3.00°	APPD: 核准:		PRODUCT NO: 产品料号: 193-F083K230-B33				
X.XX	±0.20	X.XX°	±1.00°	CHECK:dd 校对:		DATE	SCALE	UNIT	TYPE	PAGE
X.XXX	±0.10	X.XXX°	±0.500°	DRAW: 绘图: 罗求新		2016.03.29	1:1	mm	CD	1/1

由Autodesk 教育版产品制作

B

A