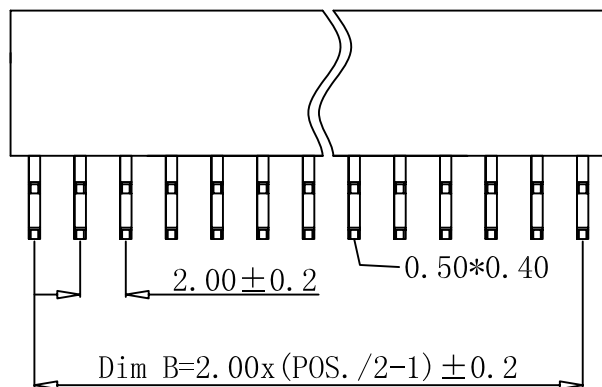
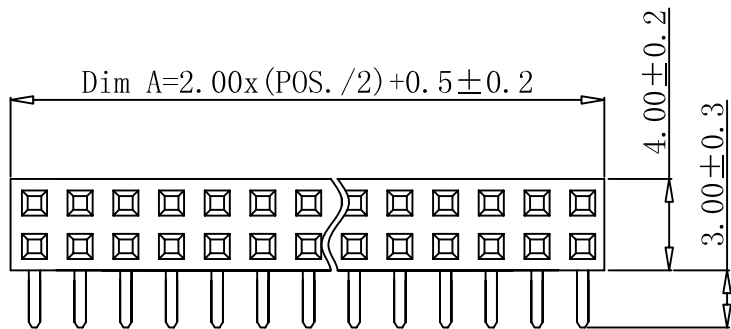


RECOMMEND P. C. B LAYOUT

DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.
12/23'13	VICKY		NEW DWG		AO

SPECIFICATIONS

Current Rating:1.5 Amp

Insulation Resistance:1000M Ω Min

Contact Resistance:20m Ω

Withstanding voltage: AC 500V min

Operating Temperature -40℃ to +105℃

Materials

Contact Material:copper Alloy and GOLD FLASH

Insulation Material:polyester.UL94-0 PA6T

Retention force before soldering $\geq$ 0.8kgf

Retention force after soldering $\geq$ 0.2kgf

Color:BLACK

PIN NO.	料号	Dim A(mm)	Dim B(mm)	PIN NO.	料号	Dim A(mm)	Dim B(mm)
2*2	130-F0428210-B02	4.5	2.0	2*12	130-F2428210-B02	24.5	22.0
2*3	130-F0628210-B02	6.5	4.0	2*13	130-F2628210-B02	26.5	24.0
2*4	130-F0828210-B02	8.5	6.0	2*14	130-F2828210-B02	28.5	26.0
2*5	130-F1028210-B02	10.5	8.0	2*15	130-F3028210-B02	30.5	28
2*6	130-F1228210-B02	12.5	10	2*16	130-F3228210-B02	32.5	30
2*7	130-F1428210-B02	14.5	12	2*17	130-F3428210-B02	34.5	32
2*8	130-F1628210-B02	16.5	14	2*18	130-F3628210-B02	36.5	34
2*9	130-F1828210-B02	18.5	16	2*19	130-F3828210-B02	38.5	36
2*10	130-F2028210-B02	20.5	18	2*20	130-F4028210-B02	40.5	38
2*11	130-F2228210-B02	22.5	20.0	2*23	130-F4628210-B02	46.5	44

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参考表				东莞市龙科电子科技有限公司 DONGGUAN LONGKE ELECTRONICS CO.,LTD :					
				TITLE: 产品品名 : 2.00MM 双排排母 DIP 90° H=6.35					
X.X	±0.25	X.X°	±3.00°	APPD: 核准:		PRODUCT NO: 产品料号 : SEE NOTE			
X.XX	±0.20	X.XX°	±1.00°	CHECK:dd 校对:		DATE	SCALE	UNIT	PAGE
X.XXX	±0.010	X.XXX°	±0.500°	DRAW: 绘图:		2013.12.20	1:1	mm	CD 1/1