

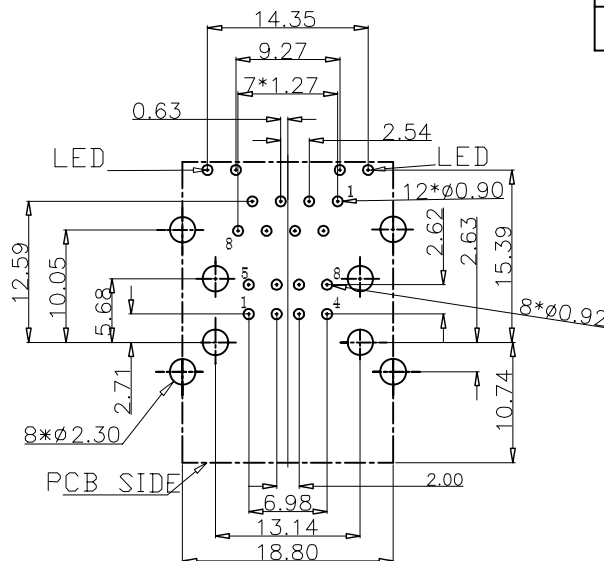
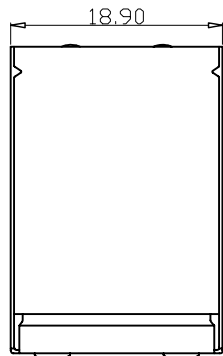


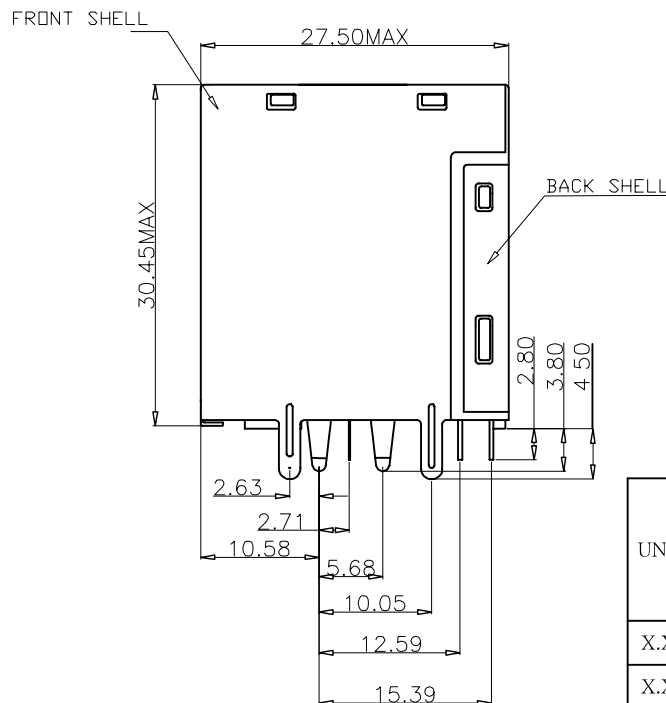

RECOMMEND PCB LAYOUT
TOLERANCE $\pm 0.05\text{mm}$

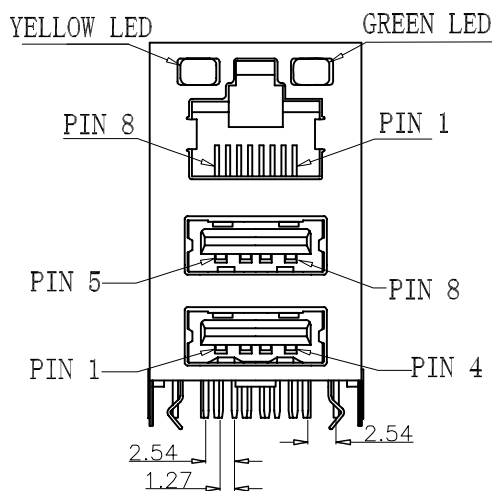

DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.
12/23'13	VICKY		NEW DWG		AO

MATERIALS:

INSULATOR: PBT+30%GF (UL94V-0 COLOR: BLACK)

CONTACT: Copper alloy

USB SHELL: SPCC T=0.30 $\pm$ 0.01mm

FRONT SHELL: SPCC T=0.25 $\pm$ 0.01mm

BACK SHELL: SPCC T=0.25 $\pm$ 0.01mm

FINISH:

CONTACT PLATED: GOLD FLASH

SHELL: NICKEL PLATED

ELECTRICAL CHARACTERISTICS:

CONTACT CURRENT RATING: 1A

DIELECTRIC WITHSTANDING VOLTAGE: AC 500V/60sec.r.m.s

INSULATOR RESISTANCE: 1000 M Ω MIN AT 500VDC

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参考表				东莞市龙科电子科技有限公司 DONGGUAN LONGKE ELECTRONICS CO.,LTD:					
X.X	± 0.25	X.X°	$\pm 3.00^\circ$	APPD: 核准:	TITLE: RJ45+USB2X4P 产品品名: 网卡头带灯长脚				
X.XX	± 0.20	X.XX°	$\pm 1.00^\circ$	CHECK:dd 校对:	DATE	SCALE	UNIT	TYPE	PAGE
X.XXX	± 0.010	X.XXX°	$\pm 0.500^\circ$	DRAW: 绘图:	2013.12.20	1:1	mm	CD	1/1