
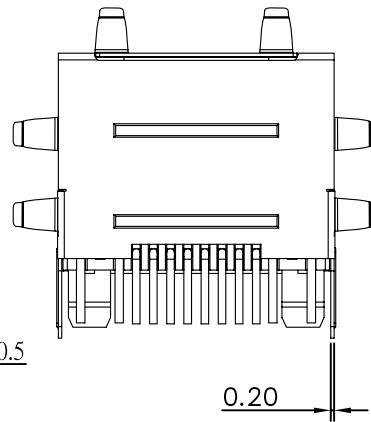
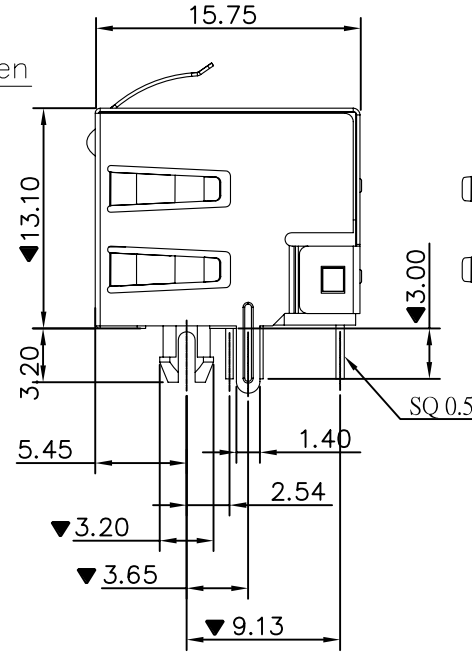


DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.
3/29'14			NEW DWG		AO

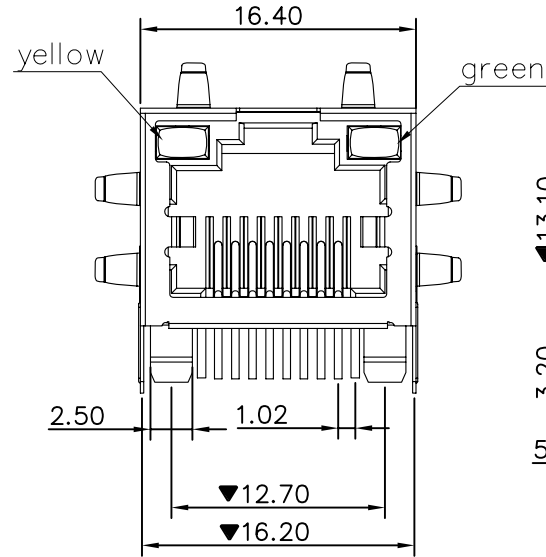

NOTES:

1.Material:

1.1>.HOUSING: PBT UL94V-0,COLOR: BLACK;
RJ45 TERMINAL:PHOSPHOR BRONZE $\phi=0.45\text{mm}$
PLATING: GOLD PLATED(see note) OVER 30~80u"NI
UNDERPLATED OVERALL

1.2>.SHELL: BRASS C2680 T=0.20;Ni 30u"Min



1.3>.LED:

HOUSING: Epoxy Resin
TERMINALS:SPCC T=0.5mm
PLATING:Outer plating: Tin 80u"
Middle Plating: Ni 10u"
Center plating: Cu 20u"


PART NO.

241-F122G41 X -B06


—A=端子镀金G/F
1=端子镀金3u"
2=端子镀金6u"

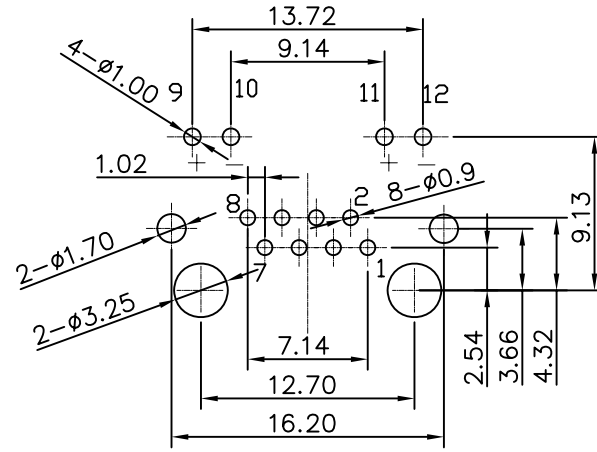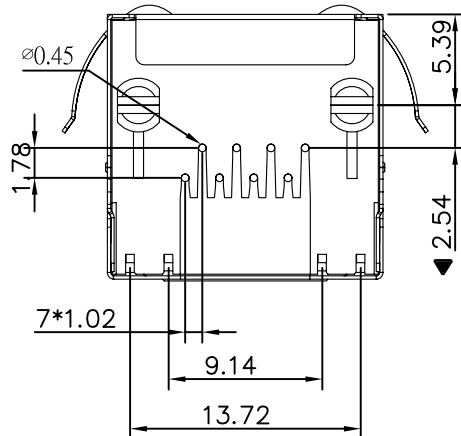

RECOMMENDED P.C.B LAYOUT
TOP VIEW (COMPONENT SIDE)



规格	料号
左黄右绿	241-F122G41A-B06
左绿右黄	

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参考表			 东莞市龙科电子科技有限公司 DONGGUAN LONGKE ELECTRONICS CO.,LTD :	
			 TITLE: 产品品名： 8P8C全包有灯有弹	
X.X	±0.25	X.X° ±3.00°	APPD: 核准：	
X.XX	±0.20	X.XX° ±1.00°	PRODUCT NO: 产品料号： 241-F122G41X-B06	
X.XXX	±0.10	X.XXX° ±0.500°	CHECK:dd 校对：	DATE 2015.03.25
			DRAW: 绘图： 范小飞	SCALE 1:1
			UNIT mm	TYPE CD
			PAGE 1/1	