

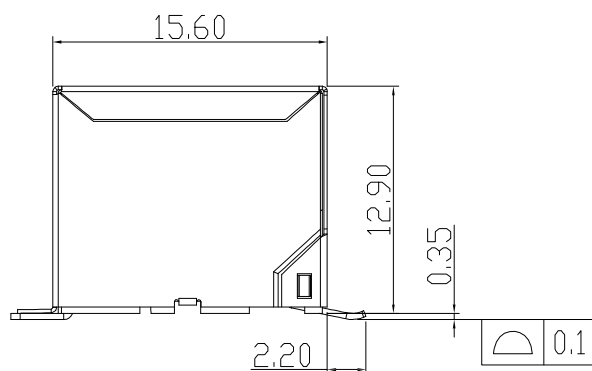


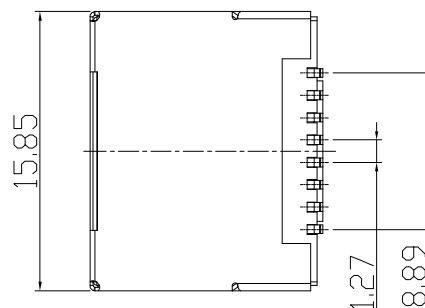


DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.
06/06'16	何俊勇		NEW DWG		A0

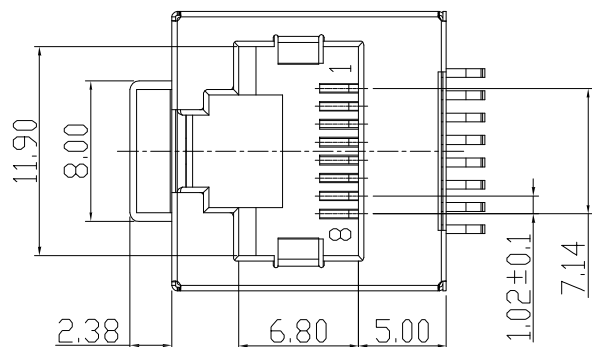

SPECIFICATION

1. VOLTAGE RATING: 125 VAC RMS.
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 40 mΩ MAX
4. INSULATION RESISTANCE: 500MΩ MIN.
5. WITHSTAND VOLTAGE:
AC1000V RMS 50Hz or 60Hz MIN.
6. OPERATING TEMPERATURE: -40°C~+80°C

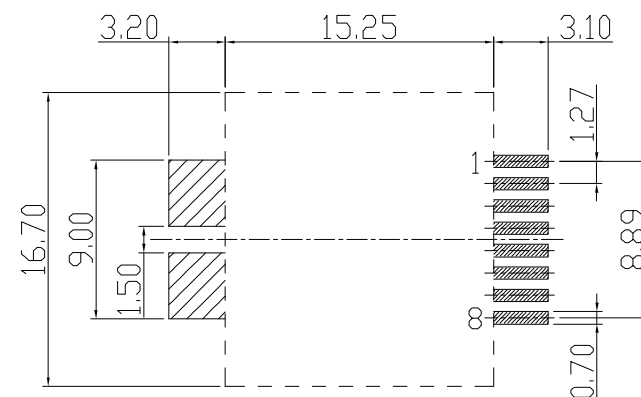

Recommend PCB Layout
(Jack Top View)
Tolerance: ±0.05mm

e	SHELL	1	BRASS T=0.2mm	Ni PALTING	
d	ME	1	BRASS T=0.35mm	Tin PALTING	
c	TERMINAL	8	PHOSPHOR BRONZE T=0.35mm	Au/Tin PALTING	
b	INSERT	1	PA9T UL94V-0	BLACK	
a	HOUSING	1	PA9T UL94V-0	BLACK	
NO	PART NAMF	O'TY	MATFRIAL	PLATING & COLOR	Remark

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参考表				东莞市龙科电子科技有限公司 DONGGUAN LONGKE ELECTRONICS CO.,LTD :						
X.X ±0.25		X.X* ±3.00°		APPD: 核准: 刘威		TITLE: 产品品名: RJ45 8P8C 180° SMT屏蔽				
X.XX ±0.20		X.XX* ±1.00°		CHECK:dd 校对: 范小飞		PRODUCT NO: 产品料号: 241-F083G31A-B67				
X.XXX ±0.10		X.XXX* ±0.500°		DRAW: 绘图: 何俊勇		DATE	SCALE	UNIT	TYPE	PAGE
						2016.06.06	1:1	mm	CD	1/1