


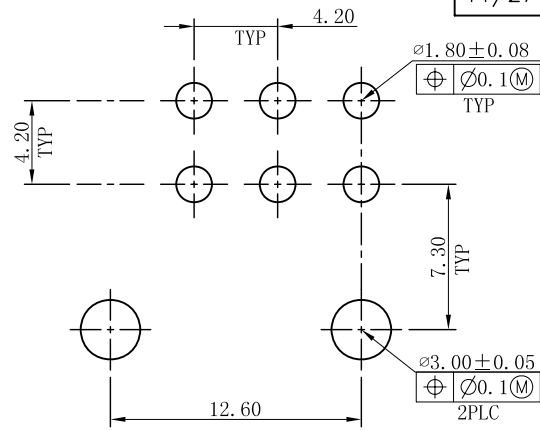


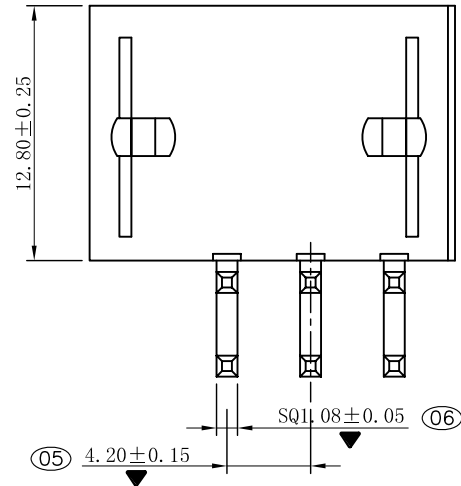


备注：检验尺寸：①～⑨

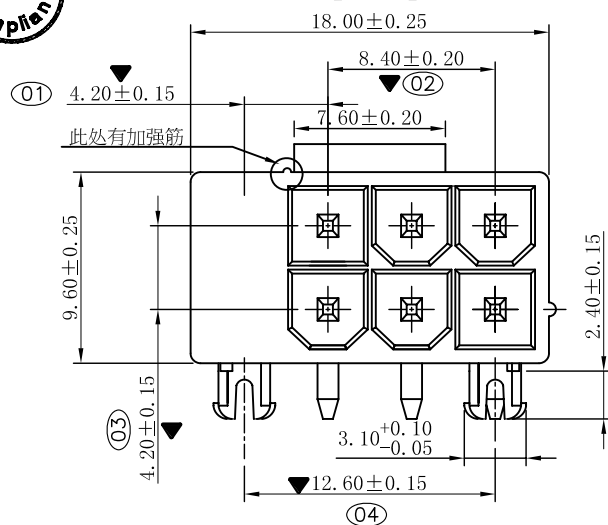

RECOMMENDED P. C. B. HOLE LAYOUT
(TOLERANCE: ± 0.05)

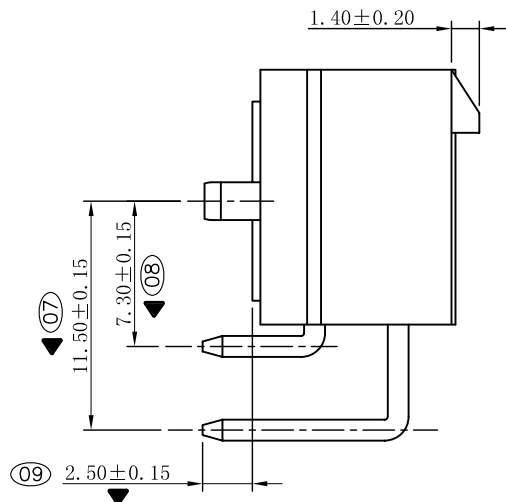

NOTES:
1.MATERIAL:
HOUSING:LCP,UL 94V-0,COLOR: BLACK
CONTACT:BRASS,SQ.1.08mm.
2.FINISH:
CONTACT:120u" MIN TIN PLATED OVER,
50u"MIN. NICKEL UNDER PLATING ALL OVER.
3.SPECIFICATION:
CONTACT RESISTANCE:20mΩ MAX.
INSULATION RESISTANCE:1000MΩ.
VOLTAGE RATING:250VAC.
CURRENT RATING:9AMPS.
TEMPERTATURE RANGE:-55°C TO +105°C.

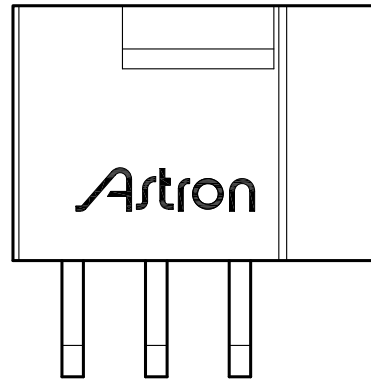

15=ATX 0 -M 06 2 E 3 1 Q-B 51
产品代码 流水号
M=公座 B=black
产品Pin 数 Q=镀雾锡
2=DIP90度 1=真空盒包装
3=双排有柱
E=Pin距4.20

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参考表		东莞市龙科电子科技有限公司 DONGGUAN LONGKE ELECTRONICS CO.,LTD :						
X.X ±0.25	X.X° ±3.00°	APPD: 核准:		TITLE: ATX(P=4.2) R/A 2X4P 无卤 产品品名: 有LOGO				
X.XX ±0.20	X.XX° ±1.00°	CHECK:dd 校对:		DATE	SCALE	UNIT	TYPE	PAGE
X.XXX ±0.010	X.XXX° ±0.500°	DRAW: 绘图: 罗求新		2017.12.15	1:1	mm	CD	1/1