




DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.
12/23'13	VICKY		NEW DWG		A0
04/03'19	LQX		更? 叉??度		A1

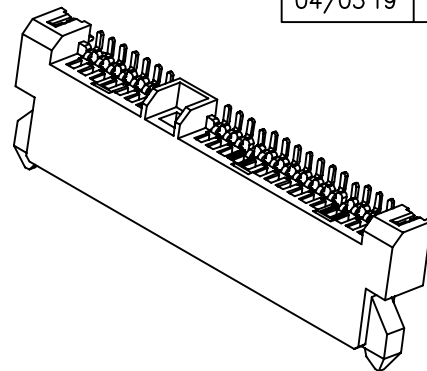

SPECIFICATION

WATERIAL HOSING: LCP UL94V-O

TERMINAL: PHOSPHOR BRONZE C5191

BOARD LOCK: BRASS C2680

MECHANICAL: INSERTION FORCE:45N Max

WITHDRAWAL FORCE: 10N Min

DURABILITY: 500 CYCLES

LWCTRICAL:

RATED CURRENT: 1.5Amp

INSULATION RESISTANCE: 1000M Ω Min



CONTACT RESISTANCE: 30M Ω Max

DIELECTRIC WITSTANDING VOLTAGE AC 500V
FOR 1 MINUTE

OPERATING TEMPERATURE: -40°C+~+85°C

SOLDERING TEMPERATURE: 260°C FOR 3~5s Max

STANDARD: GOLD FLASH ALL OVER

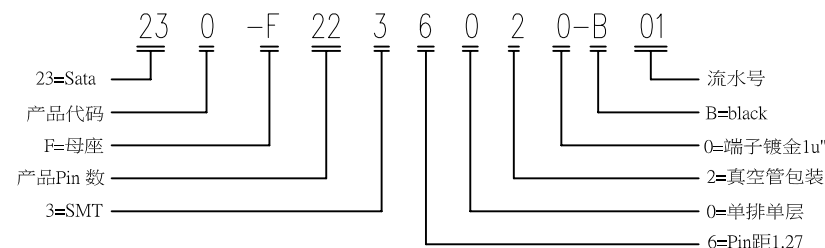

RECOMMENDED P.C.B OARD LAYOUT
PCB TOLERANCE:±0.05

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参考表				 东莞市龙科电子科技有限公司 DONGGUAN LONGKE ELECTRONICS CO.,LTD.											
				 		TITLE: SATA 7+15 PIN H=4.2 产品品名：SMT 板下									
X.X ±0.25		X.X° ±3.00°		APPD: 核准：		PRODUCT NO: 产品料号：230-F2236020-B01									
X.XX ±0.20		X.XX° ±1.00°		CHECK:dd 校对：罗求新		DATE		SCALE		UNIT		TYPE		PAGE	
X.XXX ±0.010		X.XXX° ±0.500°		DRAW: 绘图：范小飞		2013.12.20		1:1		mm		CD		1/1	